



300B SE

Idel chance to set-based SE amplifier 300B with stabilized lamp filament, and the rectifier tube (eg 5u4gb).

Caption



price	price	sizes	overall dimensions
I_{\max}	maximum current	core	core type
P_{\max}	maximum power	core	core type
R_a	anode resistance	sizes	overall dimensions
U_{we}	input voltage	UL	peel off the ultra-linear
weight	approximate weight	f_{zas}	operating frequency
I_{\max}	maximum current	$k_{n:n}$	transmission
price	price	price	price
$U_{n/In}$	output voltage for current	R_o	load resistance
core	core type	f_{\max}	maximum frequency
L_a	anode inductance, $f = 120\text{Hz}$	R	resistance
sizes	overall dimensions	weight	approximate weight
P_{\max}	maximum power	weight	approximate weight
f_{\min}	minimum frequency	Z_a	Anode impedance
L	inductance, $f = 120\text{Hz}$		

Specyfikacje

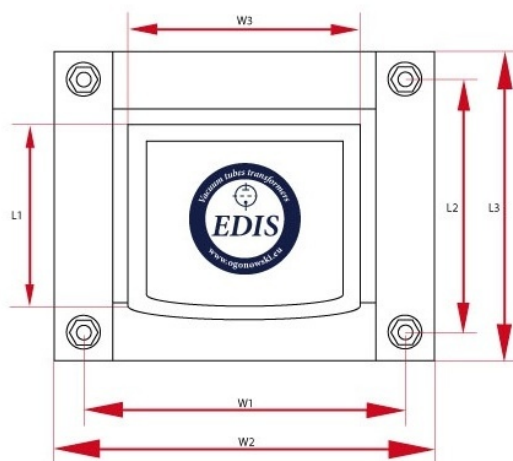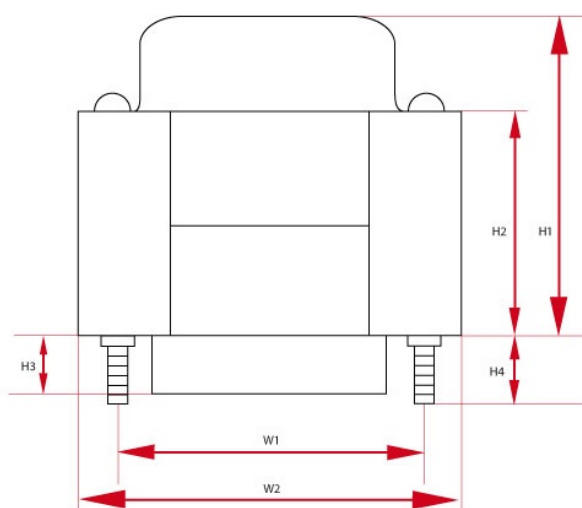

Power Transformer - TS120-5/10 - wersja z jednym dekielkiem (PL)

P_{\max}	U_{in}	F_z	Core	Size W	Size H	Size L	Weight
120 W	230 V	50 Hz	EI96/35	W1 - 110 mm W2 - 110 mm W3 - 110 mm	H1 - 110 mm H2 - 110 mm	L1 - 110 mm L2 - 110 mm L3 - 110 mm L4 - 110 mm	3.5 kg

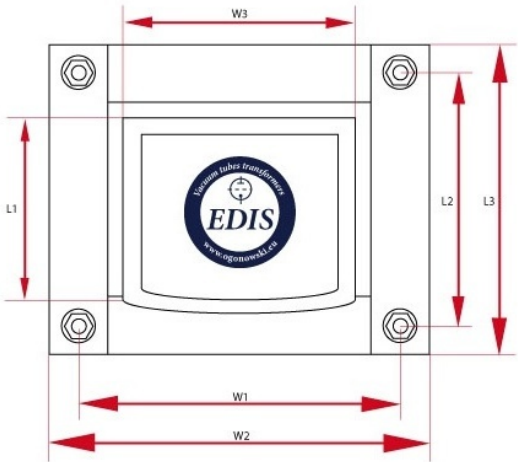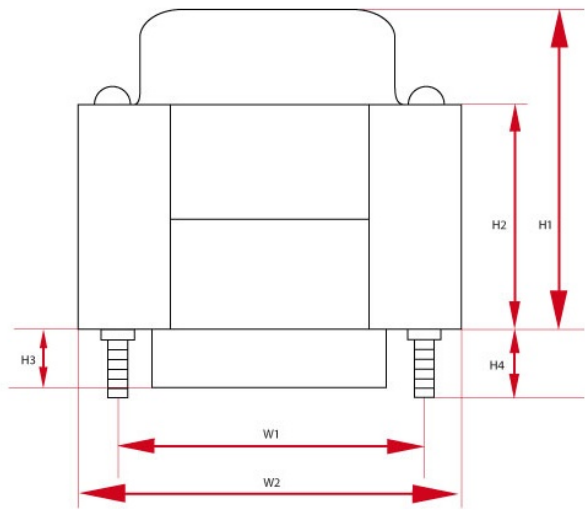

Choke - D8-1 - wersja z jednym dekielkiem

L	R	I _{max}	Core	Size W	Size H	Size L	Weight	Count
8 H	80 Ω	0.15mA mA	EI66/32	W1 - 110 mm W2 - 110 mm W3 - 110 mm	H1 - 110 mm H2 - 110 mm	L1 - 110 mm L2 - 110 mm L3 - 110 mm L4 - 110 mm	1.2 kG	2