


LO SE100-1

Ideal for amplifiers on 6GM70 tubes and 845 or 211. The transformer is made on the annealed cores, thickness of laminations 0.3 mm .

Caption

I_{\max}	maximum current	weight	approximate weight
UL	peel off the ultra-linear	f_{\min}	minimum frequency
f_{\max}	maximum frequency	R_a	anode resistance
sizes	overall dimensions	$k_{n:n}$	transmission
L_a	anode inductance, $f = 120\text{Hz}$	core	core type
price	price	P_{\max}	maximum power
Z_a	Anode impedance	R_o	load resistance

Specyfikacje

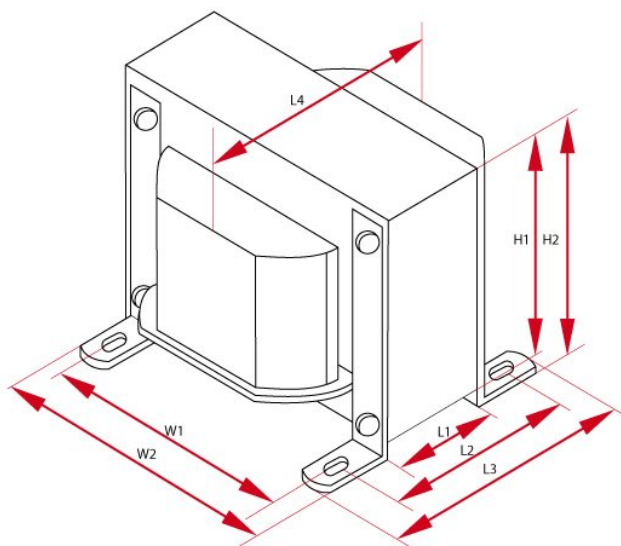

Single Ended - LO SE100-1							
P_{\max}	Z_a	I_{\max}	R_a	UL	$k_{n:n}$	R_o	L_a
100 W	7000 Ω	0,2 mA	170 Ω	-	41,8:1, 29,6:1	4 and 8 Ω	30 H
f_{\min}	f_{\max}	Core	Size W	Size H	Size L	Weight	Count
15Hz @ -3dB 20Hz @ +/-1dB	65kHz @ -3dB 40kHz @ +/-1dB	EI120/73	W1 - 100 mm W2 - 120 mm W3 - - mm	H1 - 100 mm H2 - 104 mm	L1 - 73 mm L2 - 103.5 mm L3 - 120 mm L4 - 120 mm	7 kG	1
Price							
1-5 units		5+ units		10+ units		25+ units	
202.0 USD		192.0 USD		182.0 USD		178.0 USD	