


## LO SE25-5

The transformer is made on the annealed cores, thickness of laminations 0.3 mm . ideally suited to build a SE amp on 300B tubes, EL34 and KT88.

## Caption

price	price	$P_{\max}$	maximum power
$Z_a$	Anode impedance	$I_{\max}$	maximum current
$R_o$	load resistance	$f_{\min}$	minimum frequency
core	core type	weight	approximate weight
UL	peel off the ultra-linear	$L_a$	anode inductance, $f = 120\text{Hz}$
$R_a$	anode resistance	$f_{\max}$	maximum frequency
sizes	overall dimensions	$k_{n:n}$	transmission

## Specyfikacje

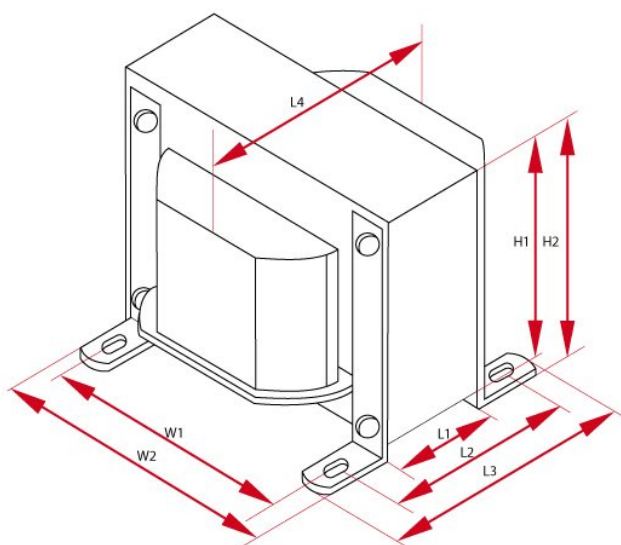

Single Ended - LO SE25-5							
$P_{\max}$	$Z_a$	$I_{\max}$	$R_a$	UL	$k_{n:n}$	$R_o$	$L_a$
25 W	2500 $\Omega$	200 mA	140 $\Omega$	-	17,6 : 1	8 $\Omega$	15 H
$f_{\min}$	$f_{\max}$	Core	Size W	Size H	Size L	Weight	Count
15Hz @ -3dB 25Hz @ +/-1dB	55kHz @ -3dB 18kHz @ +/-1dB	EI84/42	W1 - 70 mm W2 - 84 mm W3 - 110 mm	H1 - 70 mm H2 - 74 mm	L1 - 42 mm L2 - 60 mm L3 - 72 mm L4 - 82 mm	1.85 kG	1
Price							
1-5 units		5+ units		10+ units		25+ units	
88.0 USD		84.0 USD		79.0 USD		75.0 USD	