


LO SE50-3

The transformer is made on the annealed cores, thickness of laminations 0.3 mm . ideal for amplifier 300B, EL34, KT88.

Caption

price	price	P_{\max}	maximum power
Z_a	Anode impedance	I_{\max}	maximum current
R_o	load resistance	f_{\min}	minimum frequency
core	core type	weight	approximate weight
UL	peel off the ultra-linear	L_a	anode inductance, $f = 120\text{Hz}$
R_a	anode resistance	f_{\max}	maximum frequency
sizes	overall dimensions	$k_{n:n}$	transmission

Specyfikacje

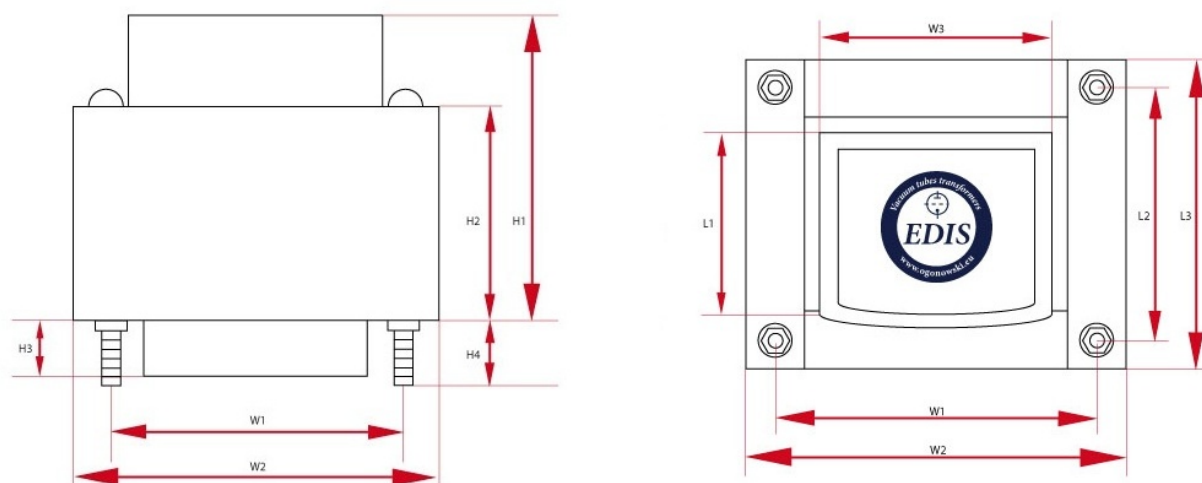

Single Ended - LO SE50-3 - wersja z jednym dekielkiem (PL)							
P_{\max}	Z_a	I_{\max}	R_a	UL	$k_{n:n}$	R_o	L_a
50 W	2500 Ω	200 mA	143 Ω	43 %	25:1 , 17.6:1	4 and 8 Ω	20 H
f_{\min}	f_{\max}	Core	Size W	Size H	Size L	Weight	Count
10Hz @ -3dB 20Hz @ +/-1dB	60kHz @ -3dB 20kHz @ +/-1dB	EI96/59pl	W1 - 110 mm W2 - 110 mm W3 - 110 mm	H1 - 110 mm H2 - 110 mm	L1 - 110 mm L2 - 110 mm L3 - 110 mm L4 - 110 mm	3.5 kG	1
Price							
1-5 units		5+ units		10+ units		25+ units	
121.0 USD		115.0 USD		109.0 USD		103.0 USD	



Single Ended - LO SE50-3 - wersja z jednym dekielkiem (DE)

P_{\max}	Z_a	I_{\max}	R_a	UL	$k_{n:n}$	R_o	L_a
50 W	2500 Ω	200 mA	143 Ω	43 %	25:1 , 17.6:1	4 and 8 Ω	20 H
f_{\min}	f_{\max}	Core	Size W	Size H	Size L	Weight	Count
10Hz @ -3dB 20Hz @ +/-1dB	60kHz @ -3dB 20kHz @ +/-1dB	EI96/59de	W1 - 110 mm W2 - 110 mm W3 - 110 mm	H1 - 110 mm H2 - 110 mm	L1 - 110 mm L2 - 110 mm L3 - 110 mm L4 - 110 mm	3.5 kG	1
Price							
1-5 units		5+ units		10+ units		25+ units	
121.0 USD		115.0 USD		109.0 USD		103.0 USD	