
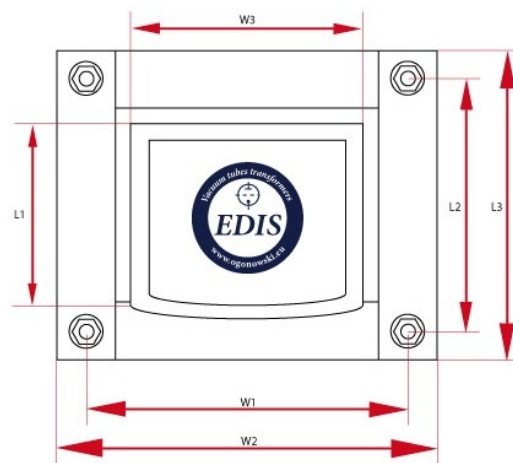


LO PP40-1

Legende


L_{aa}	Andodeninduktivitaet bei $f=120\text{Hz}$	R_{aa}	Anode-Anode Resistenz
groesse	ca. Ausmessung	$k_{n:n}$	Uebersetzung
gewicht	Gesamtgewicht	Z_{aa}	Anode-Anode Impedanz
UL	Ultralinear Anzapfung	R_L	Lastresistenz
I_{max}	Max. Anodenstrom	f_{max}	Max. Frequenz
kern	Kerntyp	preis	Preis inkl. Steuer
f_{min}	Min. Frequenz	P_{max}	Max. Leistung

Specyfikacje

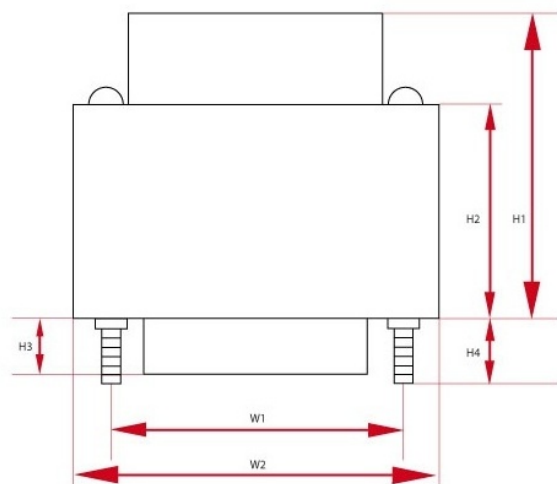

Push Pull - LO PP40-1 - wersja z jednym dekielkiem (PL)

P_{max}	Z_a	I_{max}	R_{aa}	UL	$k_{n:n}$	R_o	L_a
40 W	6600 Ω	200 mA	173 Ω	43 %	40.6 : 1, 28.7 : 1	4 i 8 Ω	44 H
f_{min}	f_{max}	Kern	Groesse W	Groesse H	Groesse L	Gewicht	Stueckzahl
15Hz @ -3dB	68kHz @ -3dB	EI84/42	W1 - 110 mm W2 - 110 mm W3 - 110 mm	H1 - 110 mm H2 - 110 mm	L1 - 110 mm L2 - 110 mm L3 - 110 mm L4 - 110 mm	1.86 kG	1
Preis							
1-5 sztuk		5+ sztuk		10+ sztuk		25+ sztuk	
82.0 EUR		78.0 EUR		74.0 EUR		70.0 EUR	

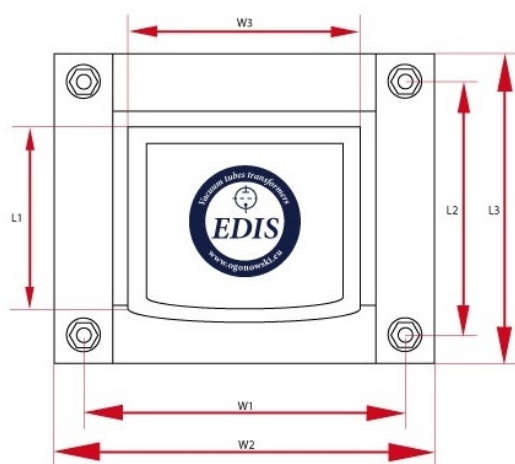

Push Pull - LO PP40-1 - wersja z jednym dekielkiem (DE)

P_{\max}	Z_a	I_{\max}	R_{aa}	UL	$k_{n:n}$	R_o	L_a
40 W	6600 Ω	200 mA	173 Ω	43 %	40.6 : 1, 28.7 : 1	4 i 8 Ω	44 H
f_{\min}	f_{\max}	Kern	Groesse W	Groesse H	Groesse L	Gewicht	Stueckzahl
15Hz @ -3dB	68kHz @ -3dB	EI84/42	W1 - 110 mm W2 - 110 mm W3 - 110 mm	H1 - 110 mm H2 - 110 mm	L1 - 110 mm L2 - 110 mm L3 - 110 mm L4 - 110 mm	1.86 kG	1
Preis							
1-5 sztuk		5+ sztuk		10+ sztuk		25+ sztuk	
82.0 EUR		78.0 EUR		74.0 EUR		70.0 EUR	